

Project:	
Type:	
Catalog #:	



STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Single or double face configurations.

ELECTRICAL

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Compatible with drywall or drop-thru ceiling mount installations.
- Wall mount capability optional.

HOUSING

- Premium-grade, extruded aluminum housing.
- Trim assembly is easily detachable, providing accessibility for service or maintenance.


OPTIONS

- WM: Wall mount.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

DIMENSIONS

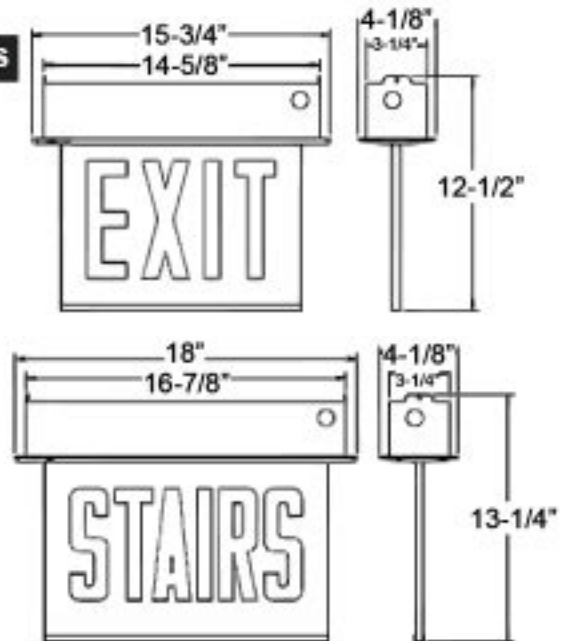

ORDERING INFORMATION

Sample Part Number: CARELZXTE-2-RW-A-EM-NA

Model	No. of faces	Letter	Housing	Battery	Options	Signage/Directional Arrows
CARELZXTE	1 Single Face	RW Red on white	A Aluminum W White	Blank AC only EM Ni-Cd battery	WM Wall Mount ¹	NA Exit No Arrow
	2 Double Face					SWNA Stairs No Arrow
						DA Exit Double Arrow
						SWDA Stairs Double Arrow
						RA ¹ Exit Right Arrow
						SWRA ¹ Stairs Right Arrow
						LA ¹ Exit Left arrow
						SWLA ¹ Stairs Left Arrow
						LARA ² Exit Left/Right Arrow
						SWLARA ² Stairs Left/Right Arrow

Notes:


1. Available in single face configuration only
2. Available in double face configuration only

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
AC Model	4.3	4.7	0.040A	0.02A
EM Model	4.5	4.9	0.042A	0.02A

WALL MOUNT DIMENSIONS

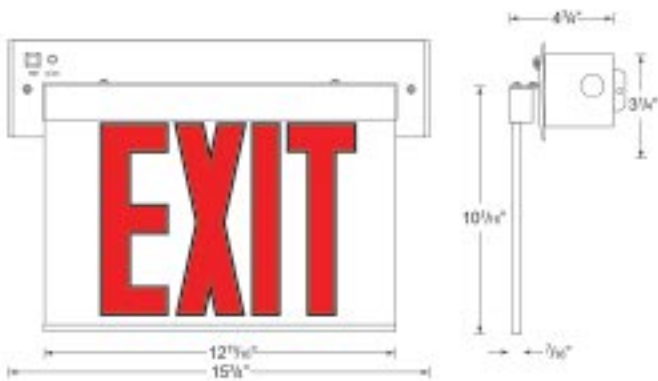

ARROW CONFIGURATION

