

Project:	
Type:	
Catalog #:	



STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- Single or double face configurations.

ELECTRICAL

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable Ni-Cd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on backplate for wall mount.


HOUSING

- 20-gauge steel housing.
- Neutral white finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

DIMENSIONS

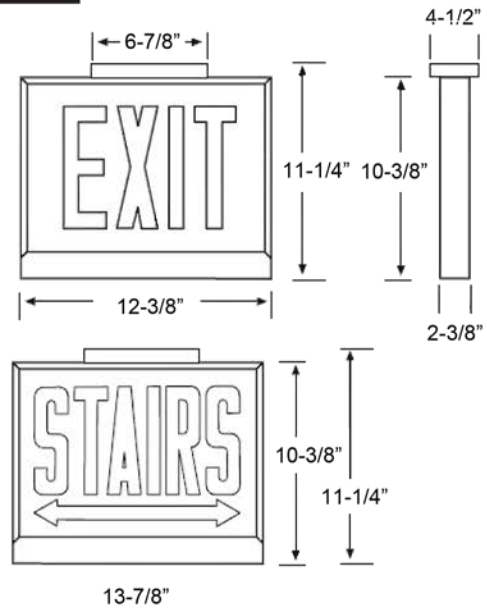

ORDERING INFORMATION

Sample Part Number: **CAXTEU-2-R-W-EM-NA**

Model	No. of faces	Letter	Housing	Battery	Signage / Directional Arrows
CAXTEU	1 Single Face	R Red	W White	Blank AC only	NA Exit No Arrow
	2 Double Face		B Black	EM Ni-Cd battery	SWNA Stairs No Arrow
					DA Exit Double Arrow
					SWDA Stairs Double Arrow
					RA ¹ Exit Right Arrow
					SWRA ¹ Stairs Right Arrow
					LA ¹ Exit Left arrow
					SWLA ¹ Stairs Left Arrow
					LARA ² Exit Left/Right Arrow
					SWLARA ² Stairs Left/Right Arrow

Notes:

1. Available in single face configuration only
2. Available in double face configuration only

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
All Models	5.0	5.0	0.10A	0.05A

ARR OW CO NF IGUR AT IO N

