


## ELECTRONIC BALLAST

# IG13-20EL/T9

- One Lamp
- Pre-Wired With Plug
- Small Case Size
- Lightweight

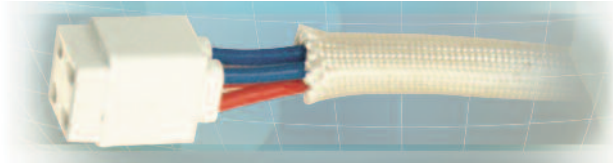

### PLUG FOR CIRCLINE LAMPS



## Features & Benefits

Suitable for one FC8T9 CIRCLINE 22 WATT lamp.  
 Class A Sound Rating  
 More efficient compared to standard magnetic ballasts  
 Lead wires do not interfere with mounting holes


Contains No PCBs  
 Eliminates strobing  
 Thermal potting  
 Metal enclosure  
 Rapid Start



## SPECIFICATIONS

- Operating Voltage: 120 VAC  $\pm$  10%
- Frequency: 50/60Hz
- Protection: Class P Inherent Thermal Protection
- Regulatory Approvals: UL, CUL Listed
- Over Current: Fuse
- Min. Starting Temp: 0°F (-17.78°C)
- Max. Case Temp: 158°F (75°C)
- FCC, 47 CFR, Part 18 Consumer Limits
- Type 1 Outdoor, Normal Power Factor

### DIMENSIONS

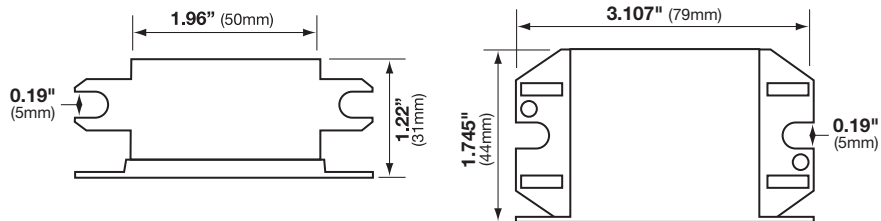

Weight: 5.2 oz. Case Quantity: 50pcs Case Weight: 16 lbs Standard Lead Length: black/white-12" blue/red-12"

Line Voltage	Lamp Type	Line Current	Input Power	Power Factor	Crest Factor	Ballast Factor	THD Percent	Min Start Temp
120	FC8T9	0.2	12.7	.531	1.38	0.56	93.2	0°F

For warranty information refer to Inter-Global's BALLAST LIMITED WARRANTY in the back of the Ballast section of this catalog.

For more information contact our sales department at 1-800-325-7364 or visit [www.interglobal-inc.com](http://www.interglobal-inc.com)  
 Specifications subject to change without notice. Printed in U.S.A. © 2013 Inter-Global Inc.

1607.1