

SPECIFICATION SHEET: WH3-277-L

This Is An Original Product From Fulham Co., Inc

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Also Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (277V APPLICATIONS)

INPUT VOLT: 277V ± 10%	, 50/60Hz									
LAMP WATTS/TYPE	54WT5HO	* F32T8	* F32T8	CR32W	CFQ18W	CFQ18W	* CR40WT9	F39T5HO		
LAMPS OPERATED	1	1	2	1	1	2	1	1		
INPUT WATTS	57	38	62	28	25	41	37	37		
LINE CURRENT:	0.22	0.16	0.24	0.13	0.11	0.16	0.16	0.15		
POWER FACTOR	0.92	0.88	0.93	0.81	0.90	0.92	0.90	0.86		
BALLAST FACTOR	1.02	1.35	1.10	0.91	1.41	1.16	0.78	0.84		
EFFICACY FACTOR	1.80	3.53	1.77	3.21	5.72	2.86	2.14	2.28		
THD	33%	33%	33%	36%	38%	37%	35%	36%		
EMI/RFI COMPLIANCE		FCC PART 18-A (Non-Consumer)								
SOUND RATING		" A "								
BALLAST TYPE				INSTAN	NT START					
VOLTAGE TRANSIENTS				ANS	162.41					
INPUT/PROTECTION		FUSE								
MIN. OPERATING TEMP		-30 °C (-20 °F)								
MAX. CASE TEMP		70 °C (158 °F)								
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR									
APPROVALS/CLASS	* UL /cUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR									



WIRING DIAGRAMS								
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN		
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	36 <u>+</u> 1"	-	36 <u>+</u> 1"	-		

FOR WIRING DIAGRAM, PLEASE REFER TO FULHAM'S CATALOG

NOTE: This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

2006-40SP-1 rev K



SPECIFICATION SHEET: WH3-277-L

This Is An Original Product From Fulham Co., Inc

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Also Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (277V APPLICATIONS)

		-		•		-		
INPUT VOLT: 277V ± 10%	,50/60Hz						·	
LAMP WATTS/TYPE	CFT13W	CFT13W	CFTR18W	CFTR26W	CFTR32W	*F17T8	F24T5HO	
LAMPS OPERATED	1	2	2	1	1	2	2	
INPUT WATTS	17	26	24	27	32	36	41	
LINE CURRENT:	0.09	0.11	0.11	0.12	0.14	0.14	0.16	
POWER FACTOR	0.90	0.90	0.90	0.90	0.90	0.93	0.93	
BALLAST FACTOR	1.21	0.97	1.43	1.00	0.76	1.15	0.81	
EFFICACY FACTOR	7.19	3.68	5.95	3.67	2.34	3.22	1.99	
THD	39%	37%	38%	37%	36%	35%	34%	
EMI/RFI COMPLIANCE		FCC PART 18-A (Non-Consumer)						
SOUND RATING		" A "						
BALLAST TYPE			IN	STANT STA	AR T			
VOLTAGE TRANSIENTS				ANSI 62.41				
INPUT/PROTECTION		FUSE						
MIN. OPERATING TEMP		-30 °C (-20 °F)						
MAX. CASE TEMP		70 °C (158 °F)						
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							
APPROVALS/CLASS		* UL /cUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR						



WIRING DIAGRAMS								
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN		
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	36 <u>+</u> 1"	-	36 <u>+</u> 1"	-		

FOR WIRING DIAGRAM, PLEASE REFER TO FULHAM'S CATALOG

NOTE: This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

2006-40SP-2 rev K



SPECIFICATION SHEET: WH3-277-L

This Is An Original Product From Fulham Co., Inc

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Also Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (277V APPLICATIONS)

			-			-	3		
INPUT VOLT: 277V ± 10%	,50/60Hz			•					
LAMP WATTS/TYPE	CFTR26W	CFQ26W							
LAMPS OPERATED	1	1							
INPUT WATTS	27	29							
LINE CURRENT:	0.12	0.13							
POWER FACTOR	0.81	0.83							
BALLAST FACTOR	1.00	1.00							
EFFICACY FACTOR	3.67	3.39							
THD	37%	37%							
EMI/RFI COMPLIANCE		FCC PART 18-A (Non-Consumer)							
SOUND RATING		" A "							
BALLAST TYPE			IN	STANTSTA	\RT				
VOLTAGE TRANSIENTS				ANSI 62.47	1				
INPUT/PROTECTION		FUSE							
MIN. OPERATING TEMP		-30 °C (-20 °F)							
MAX. CASE TEMP		_	7	0 °C (158 °	'F)	_			
APPROVALS/CLASS		UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							
APPROVALS/CLASS		* UL /cUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							

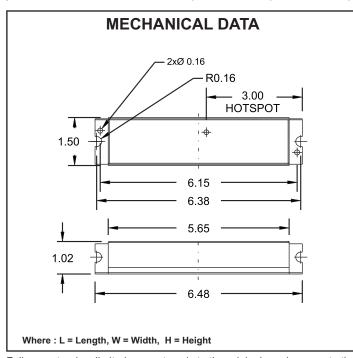

WIRING DIAGRAMS								
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN		
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	36 <u>+</u> 1"	-	36 <u>+</u> 1"	-		

FOR WIRING DIAGRAM, PLEASE REFER TO FULHAM'S CATALOG

NOTE: This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

2006-40SP-3 rev K