



RoHS Compliant



PRODUCT FEATURES




STARTING METHOD: Rapid	INPUT VOLTAGE: 120-277VAC ±10%	WARRANTY: 5 Years
LAMP CONNECTION: Series	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
CFQ26W/G24q	2	120	53.0	0.45	0.99	1.57	0.95	1.79	10	P2-2
		277	53.0	0.20	0.98	1.57	0.95	1.79	10	P2-2
	1	120	33.0	0.27	0.99	1.58	1.10	3.33	12	P1-2
		277	33.0	0.12	0.96	1.58	1.10	3.33	12	P1-2
CFTR26W/GX24q	2	120	53.0	0.45	0.99	1.57	0.95	1.79	10	P2-2
		277	53.0	0.20	0.98	1.57	0.95	1.79	10	P2-2
	1	120	33.0	0.27	0.99	1.58	1.10	3.33	12	P1-2
		277	33.0	0.12	0.96	1.58	1.10	3.33	12	P1-2
F24T5HO	2	120	51.0	0.44	0.99	1.47	1.00	1.96	10	F2-12
		277	51.0	0.19	0.98	1.47	1.00	1.96	10	F2-12
CFTR32W/GX24q	1	120	41.0	0.35	0.99	1.53	1.20	2.93	10	P1-2
		277	41.0	0.16	0.96	1.53	1.20	2.93	10	P1-2
CFTR42W/GX24q	1	120	49.0	0.42	0.99	1.48	1.10	2.24	10	P1-2
		277	49.0	0.19	0.97	1.48	1.10	2.24	10	P1-2
FC16T9	1	120	43.0	0.36	0.99	1.46	1.00	2.33	10	P1-2
		277	43.0	0.16	0.97	1.46	1.00	2.33	10	P1-2

WIRING DIAGRAMS

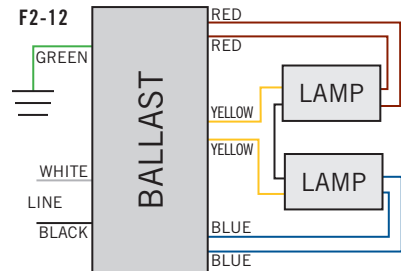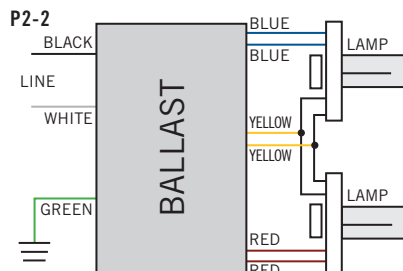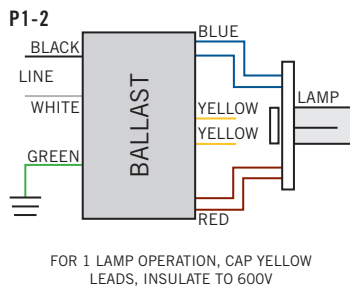




KTEB-226-UV-TP-PIC-DW

CFL ELECTRONIC FLUORESCENT


CASE STYLE/DIMENSIONS

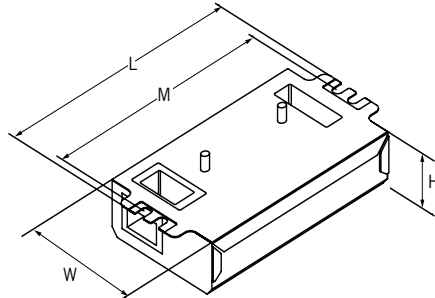

CASE DIMENSIONS

LENGTH: 5.00"
WIDTH: 2.40"
HEIGHT: 1.00"
MOUNTING: 4.63"
UNIT WEIGHT: 0.91 lbs

HOT SPOT LOCATION

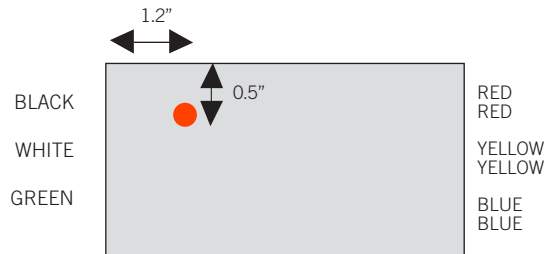

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-226-UB-TP-PIC-DW-CP	Carton	20	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-226-UV-TP-PIC-DW

