

PRODUCT FEATURES


STARTING METHOD: Instant	INPUT VOLTAGE: 120 VAC ±10%	WARRANTY: 3 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 60 Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°, 75°
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- Lamp End-of-Life Protected
- uL, cUL 935 Listed

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%
F96T8	2	115	0.97	0.995	1.58	0.88	0.77	10
F96T8	1	67	0.57	0.988	1.46	0.88	1.31	10

WIRING DIAGRAMS

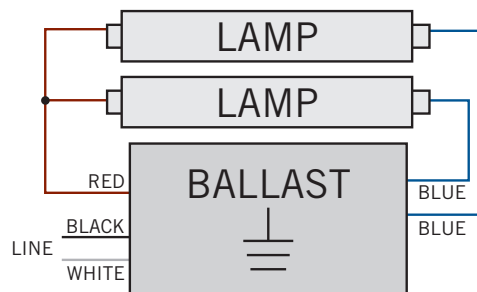




KTEB-259-1-IS-N

T8 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

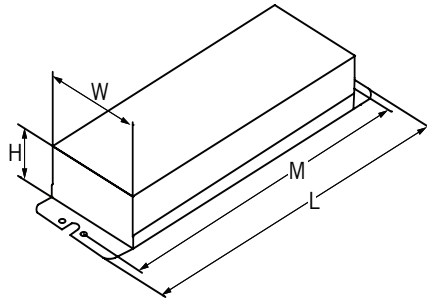

CASE DIMENSIONS

LENGTH: 9.45"
WIDTH: 1.80"
HEIGHT: 1.37"
MOUNTING: 8.90"

STANDARD LEAD LENGTHS*

BLACK: 22.00"
WHITE: 22.00"
BLUE: 46.00"
RED: 70.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION



ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-259-1-IS-N-DP	Distributor Pack	10	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-259-1-IS-N

